



Body Style: Convertible

Layout: Transverse front engine, FWD

Seat Layout: 2/2

EPA Vehicle Class: Small car

Assembly: Sterling Heights, Mich.

2010 CHRYSLER SEBRING CONVERTIBLE—TOP DOWN, THE BEST CONVERTIBLE

The 2010 Chrysler Sebring Convertible delivers what no other convertible on the road can: Chrysler's sleek and elegant design, exhilarating performance, 29-mpg highway fuel efficiency, a spacious interior that comfortably seats four adults and enough trunk room to hold two golf bags, even when the top is down.

With a new smooth appearance hood and new wheel designs, the 2010 Chrysler Sebring Convertible gets an updated appearance. Convertible top options include a body-color painted steel retractable hard top (standard on Sebring Convertible Limited) and a power cloth top (standard on Sebring LX and Touring), both featuring a tonneau cover on all models. Top up or down, Chrysler Sebring Convertible provides the benefits of a coupe and the true open-air freedom of a convertible at an affordable price.

As many as four occupants may experience Chrysler Sebring Convertible's comfortable, roomy interior. Rear-seat passengers have plenty of head and leg room, while a best-in-class 13.1 cu.ft. of trunk space gives Sebring Convertible year-round functionality.

The 2010 Chrysler Sebring Convertible's standard 2.4-liter four-cylinder World Engine with dual Variable-valve Timing (VVT) delivers 20 miles-per-gallon (mpg) in the city and 29 mpg on the highway. In addition, a 3.5-liter V-6 engine that produces 235 horsepower (175 kW) and 232 lb.-ft. (232 N•m) of torque coupled with a six-speed automatic transmission with Auto Stick delivers excellent performance and fuel efficiency, as well as smooth and quiet operation. Sebring Convertible's 3.5-liter V-6 engine achieves 16 mpg in the city and 26 mpg on the highway.

Chrysler Sebring Convertible has a rigid body structure that provides a quiet, comfortable ride and reduces cowl shake, even when the top is down. Front-wheel-drive architecture and three-box vehicle design contribute to a body that is 2.5-times stiffer in twist and 1.5-times stiffer in bending than the previous-generation Chrysler Sebring Convertible. These refinements make the Chrysler Sebring Convertible structure stiffer than other convertibles on the market that cost thousands of dollars more.

NEW FOR 2010

- Refreshed exterior with sleek hood appearance (all models)
- New aluminum and chrome-clad wheel designs (all models)
- New instrument-panel gauge cluster (all models)
- Driver and front-passenger active head restraints (all models)

SAFETY AND SECURITY

More than 25 safety and security features including:

- Advanced Multi-stage Air Bags
- Front-seat-mounted Side Air Bags for Head and Thorax Protection
- Electronic Stability Control (ESC)
- Interior Head-impact Protection
- Side-guard Door Beams

FUEL ECONOMY (city/hwy)

2.4L DOHC I-4
20/29 – FWD

3.5L SOHC V-6
16/26 – FWD


2.7L SOHC V-6
18/26 – FWD

SEBRING CONVERTIBLE

MODELS / POWERTRAINS

MODEL	ENGINES			TRANSMISSIONS		
	2.4L I-4	2.7L V-6	3.5L V-6	4-SPEED AUTO (40TES)	4-SPEED AUTO (41TES)	6-SPEED AUTO (62TE)
LX	S	–	–	S	–	–
Touring	–	S	–	–	S	–
Limited	–	–	S	–	–	S

DIMENSIONS, IN. (MM)

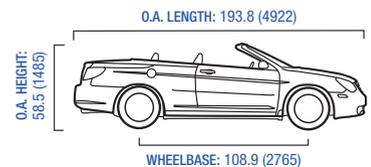

O.A. Width: 71.5 (1816)
Track, Front: 61.8 (1570)
Track, Rear: 61.8 (1570)

Curb Wt. lb.(kg):
LX: 3,742 (1697)
Touring: 3,847 (1745)
Limited: 3,959 (1796)

2010 CHRYSLER SEBRING CONVERTIBLE AT A GLANCE

America's favorite convertible offers class-leading innovations and premium amenities at an affordable price

- Two convertible top options: power cloth and retractable hard top
- Standard hard tonneau cover with automatic latching top
- Available convertible roof top and windows that retract with the push of a button on the key fob
- Available factory-installed windscreen
- Available remote start

Sleek, elegant hard-top design offers coupe styling with the fun and open-air freedom of a drop top for comfortable driving 365 days a year

Spacious interior with exceptional cargo room

- Best-in-class trunk space of 13.1 cubic feet with the top up and 6.6 cubic feet with the top down
- Trunk accommodates two golf bags when the top is retracted; four golf bags when the top is up
- Comfortable room for four adults—Sebring Convertible's rear seat provides a competitive 33.5 inches of leg room
- Front seat belts integrated into front seats for easy rear-seat entry

Fun-to-drive 3.5-liter engine provides excellent performance

- Available 3.5-liter engine with a six-speed automatic delivers 235 horsepower and 232 lb.-ft. of torque and delivers 16-mpg city and 26-mpg highway
- Available 2.7-liter V-6 engine provides flex-fuel capability and delivers 18-mpg city and 26-mpg highway
- Standard 2.4-liter World Engine is fuel efficient and fun to drive, delivering 20-mpg city and 29-mpg highway

Class-leading safety features

- Standard multi-stage driver and front-passenger air bags
- Standard front-seat-mounted side air bags for head and thorax protection
- Low-risk deployment air bags
- Standard four-wheel-disc Anti-lock Brake System (ABS)
- Driver and front-passenger active head restraints
- Available Electronic Stability Control (ESC)

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

The information shown is preliminary and based on data available at the time of publication. All dimensions are in inches (millimeters) unless otherwise noted. All dimensions are measured at curb weight with standard wheels and tires unless otherwise noted.

GENERAL INFORMATION

Body Style	Convertible
Assembly Plant	Sterling Heights Assembly, Mich.
EPA Vehicle Class	Small car

ENGINE: 2.4-LITER, GASOLINE, DOHC, 16-VALVE, VVT, SMPI I-4

Availability	Standard on Sebring Convertible LX
Type and Description	Four-cylinders inline, tuned intake manifold with Electronic Active Charge Motion Control valves, dual counter-rotating balance shafts and dual Variable-valve Timing (VVT)
Displacement	144 cu. in. (2360 cu cm)
Bore x Stroke	3.46 x 3.82 (88 x 97)
Valve System	Chain-driven DOHC, 16 valves, electronically controlled dual Variable-valve Timing (VVT), direct-acting shimless mechanical bucket tappets
Fuel Injection	Sequential, multi-port, electronic, returnless
Construction	High-pressure die cast-aluminum block with dry iron liners, cast-aluminum cylinder heads, cast-aluminum ladder frame, forged steel crankshaft
Compression Ratio	10.5:1
Power (SAE net, estimated)	173 bhp (129 kW) @ 6000 rpm (71 bhp/liter)
Torque (SAE net, estimated)	166 lb.-ft. (225 N•m) @ 4400 rpm
Max. Engine Speed	6500 rpm (electronically limited)
Fuel Requirement	Unleaded regular, 87 octane (R+M)/2
Oil Capacity	5.0 qt. (4.7L) SAE 5W-20
Coolant Capacity	7.2 qt. (6.8L)
Emission Controls	Single catalytic converter, dual heated oxygen sensors and engine features ^(a)
Estimated EPA Fuel Economy mpg (City/Hwy)	20/29

^(a) Meets Federal Tier 2, Bin 5 emissions requirements and PZEV requirements in California, Massachusetts, New York, Maine, Vermont, Connecticut, Pennsylvania, Rhode Island, New Jersey, Oregon and Washington. Meets Euro IV emissions requirements.

ENGINE: 2.7-LITER, GASOLINE, DOHC, 24-VALVE, SMPI V-6

Availability	Standard on Sebring Convertible Touring
Type and Description	60-degree, liquid-cooled, dual-tuned intake manifold with electronically controlled manifold tuning valve
Displacement	167 cu. in. (2736 cu. cm)
Bore x Stroke	3.38 x 3.09 (86 x 78.5)
Valve System	DOHC, 24 valves, hydraulic end-pivot roller followers
Fuel Injection	Sequential, multi-port, electronic
Construction	Semi-permanent mold aluminum block with cast-in iron liners, cast-aluminum heads
Compression Ratio	9.9:1
Power (SAE net, estimated)	186 bhp (139 kW) @ 5,500 rpm (68.8 bhp/liter)
Torque (SAE net, estimated)	191 lb.-ft. (260 N•m) @ 4,000 rpm
Max. Engine Speed	6,464 rpm (electronically limited)
Fuel Requirement	FFV: Unleaded regular, 87 octane (R+M)/2 or E85 ^(b)
Oil Capacity	6 qt. (5.7L) with dry filter
Coolant Capacity	9.5 qt. (9L)

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

Emission Controls	Dual close-coupled three-way catalytic converters, quad-heated oxygen sensors and internal engine features ^(c)
Estimated EPA Fuel Economy mpg (City/Hwy)	18/26

^(b) E85 fuel is a blend containing 85 percent fuel-grade ethanol and 15 percent gasoline.

^(c) Federal FFV (Flex Fuel Vehicle) can operate on both unleaded gasoline or E85 fuel, or any mixture of these fuels in Federal States. Meets Tier 2, Bin 8 emissions requirements and LEV II emissions requirements for California, Massachusetts, New York, Maine, Vermont, Connecticut, Pennsylvania, Rhode Island, New Jersey, Oregon and Washington. Meets Euro IV emissions requirements.

ENGINE: 3.5-LITER, GASOLINE, SOHC, 24-VALVE, SMPI V-6

Availability	Standard on Sebring Convertible Limited
Type and Description	60-degree bank angle, liquid-cooled, three-plenum intake manifold with electronically controlled manifold tuning valve and short-runner valves
Displacement	3518 cu. cm
Bore x Stroke	96 x 81
Valve System	SOHC, 24 valves, hydraulic, center-pivot roller rocker arms
Fuel Injection	Sequential, multi-port, electronic
Construction	Semi-permanent mold aluminum block with cast-in iron liners and cast-aluminum heads
Compression Ratio	10.0:1
Power (SAE net, estimated)	235 bhp (175 kW) @ 6,400 rpm (71.4 bhp/liter)
Torque (SAE net, estimated)	232 lb.-ft. (315 N•m) @ 4,000 rpm
Max. Engine Speed	6,800 rpm (electronically limited)
Fuel Requirement	Unleaded mid-grade, 89 octane (R+M)/2—preferred, unleaded regular, 87 octane (R+M)/2—acceptable
Oil Capacity	6 qts. (5.7L) with dry filter
Coolant Capacity	10.3 qts. (9.75L)
Emission Controls	Three-way catalytic converter, electronic EGR, and internal engine features ^(d)
Estimated EPA Fuel Economy mpg (City/Hwy)	16/26

^(d) Meets Federal Tier 2, Bin 5 emissions requirements and ULEV II requirements in California, Massachusetts, New York, Maine, Vermont, Connecticut, Pennsylvania, Rhode Island, New Jersey, Oregon and Washington. Meets Euro IV emissions requirements.

TRANSAXLE: 40TES, AUTOMATIC FOUR-SPEED OVERDRIVE

Availability	Standard with 2.4L engine
Description	4-speed overdrive, adaptive electronic control, electronically modulated converter clutch
Gear Ratios	
1st	2.842
2nd	1.57
3rd	1
4th	0.69
Reverse	2.21
Final-drive Ratio	3.91
Overall Top-gear	2.7

TRANSAXLE: 41TES, AUTOMATIC FOUR-SPEED OVERDRIVE

Availability	Standard with 2.7L engine
Description	4-speed overdrive, adaptive electronic control, electronically modulated converter clutch

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

Gear Ratios

1st	2.842
2nd	1.57
3rd	1
4th	0.69
Reverse	2.21
Final-drive Ratio	3.91
Overall Top-gear	2.7

TRANSAXLE: 62TE, AUTOMATIC SIX-SPEED OVERDRIVE

Availability	Standard with 3.5L engine
Description	Six-speed, adaptive electronic control or Auto Stick driver-interactive manual control and electronically modulated torque converter clutch

Gear Ratios

1st	4.127
2nd	2.842
3rd	2.283
4th	Upshift—1.452, WOT kickdown—1.570
5th	1
6th	0.69
Reverse	3.214
Transfer Ratio	0.95
Final-drive Ratio	3.43
Overall Top-gear	2.248

DRIVETRAIN

Front-wheel Drive

Availability	Standard with all engines
--------------	---------------------------

DIMENSIONS AND CAPACITIES

General

Wheelbase	108.9 (2765)
Track, Front	61.8 (1570)
Track, Rear	61.8 (1570)
Overall Length	193.8 (4922)
Overall Width	71.5 (1816)
Overall Height	58.5 (1485)

Aero

CdA	8.2
Cd	0.34

Fuel Tank Capacity, gal. (L)	16.9 (64.4)
------------------------------	-------------

Towing Capacity, lbs. (kg)

2.4L Engine	Not recommended
2.7L Engine	1,000 (450)
3.5L Engine	1,000 (450)

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

U.S. Curb Weight, lbs. (kg)

2.4L Gasoline Engine	Sebring Convertible 3,742 (1697)
2.7L Gasoline Engine	Sebring Convertible Touring 3,847 (1745)
3.5L Gasoline Engine	Sebring Convertible Limited 3,959 (1796)

ACCOMMODATIONS

Seating Capacity - F/R	2/2
EPA Total Interior Passenger Volume, cu. ft. (cu. m)	100 (2.83)

Front

Head Room w/Cloth Convertible Top	38.8 (984.4)
Head Room w/Retractable Hard Top	39.0 (991.8)
Leg Room	42.4 (1077.1)
Shoulder Room	56.4 (1433.2)
Hip Room	53.3 (1353.0)
Seat Travel	10.2 (260)
EPA Total Interior Volume	100.8 (2.85)
EPA Front Compartment Volume, cu. ft. (cu. m)	53.7 (1.52)

Rear

Head Room w/ Vinyl or Cloth Convertible Top	37.2 (944.7)
Head Room w/Retractable Hardtop	36.6 (929.5)
Leg Room	33.5 (850.1)
Shoulder Room	48.5 (1232.8)
Hip Room	44.2 (1123.2)
EPA Rear Compartment Volume, cu. ft. (cu. m)	35.0 (.099)

Cargo

Trunk Lift-over Height	31.6 (800.4)
EPA Total Trunk Volume – Top Up	13.1 (.370)
EPA Total Trunk Volume – Top Down	6.6 (.186)

BODY/CHASSIS

Layout	Transverse front engine, front-wheel drive
Construction	Steel unibody

SUSPENSION

Front	Independent MacPherson strut, coil spring over gas-charged shock absorbers, stabilizer bar with isolated suspension cradle
Rear	Multi-link independent with coil springs, link-type stabilizer bar, gas-charged shock absorbers and isolated rear suspension cradle

STEERING

Type	Power rack-and-pinion
Overall Ratio	16.5:1
Turning Diameter (curb-to-curb)	36.5 ft. (11.13)
Steering Turns (lock-to-lock)	3.3

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

BRAKES

Power-assist Type	All - 8 x 9 (204 x 230) tandem-diaphragm vacuum
Availability	Standard on Sebring Convertible LX
Front	
Size and Type	11.5 x 1.0 (294 x 26) vented rotors with 2.2 (57.0) single-piston floating caliper
Swept Area (Total Front)	223.5 sq. in. (1442.1 sq. cm)
Rear	
Size and Type	11.5 x 0.4 (294 x 10) solid rotor with 1.4 (35.0) single-piston floating caliper
Swept Area (Total Rear)	138.6 sq. in. (894.6 sq. cm)
Parking Brake Type	Drum-in-hat
Four-wheel Anti-lock Brake System (ABS)	Standard
Availability	Standard on Sebring Convertible Touring and Sebring Convertible Limited
Front	
Size and Type	11.5 x 1.0 (294 x 26) vented rotors with 2.2 (57.0) single-piston floating caliper
Swept Area (Total Front)	223.5 sq. in. (1442.1 sq. cm)
Rear	
Size and Type	11.88 x 0.4 (302 x 10) solid rotor with 1.4 (35.0) single-piston floating caliper
Swept Area (Total Rear)	223.2 sq. in. (1440 sq. cm)
Parking Brake Type	Drum-in-hat
Four-wheel Anti-lock Brake System (ABS)	Standard
Electronic Stability Control (ESC)	Optional
Traction Control (included with Electronic Stability Control (ESC))	Optional

WHEELS

Availability	Standard on Sebring Convertible LX
Type and Material	Steel painted with Sparkle Silver wheel cover
Size	16 in. x 6.5 in.
Availability	Standard on Sebring Convertible Touring
Type and Material	Machined and painted cast-aluminum, Sparkle Silver
Size	17 in. x 6.5 in.
Availability	Optional on Sebring Convertible Touring
Type and Material	Machined and painted cast-aluminum, Sparkle Silver
Size	18 in. x 7.0 in.
Availability	Standard on Sebring Convertible Limited
Type and Material	Chrome-clad cast-aluminum
Size	18 in. x 7.0 in.

2010 CHRYSLER SEBRING CONVERTIBLE SPECIFICATIONS

TIRES

Availability	Standard on Sebring Convertible LX
Size and Type	P215/65R16, All-season
Model	Firestone FR690
Revs per Mile (km)	774 (1245.6)

Availability	Standard on Sebring Convertible Touring, Optional on Sebring Convertible LX
Size and Type	P215/60R17, All-season Touring
Model	Bridgestone Turanza EL400
Revs per Mile (km)	772 (1242.4)

Availability	Standard on Sebring Convertible Limited, Optional on Sebring Convertible Touring
Size and Type	P215/55R18, All-season Touring
Model	Bridgestone Turanza EL400
Revs per Mile (km)	763 (1227.9)

2010 CHRYSLER SEBRING CONVERTIBLE FEATURE AVAILABILITY

LEGEND: S = Standard, O = Optional, P = Package, — = Not available

Complete package information is listed at the end of the Feature Availability section.

NOTE: Information shown is correct at time of publication and is subject to change.

	Sebring Convertible LX	Sebring Convertible Touring	Sebring Convertible Limited
EXTERIOR			
Colors			
Inferno Red Crystal Pearl Coat			
White Gold Crystal Pearl Coat			
Deep Water Blue Pearl Coat			
Silver Steel Metallic Clear Coat			
Bright Silver Metallic Clear Coat			
Brilliant Black Crystal Pearl Coat			
Stone White Clear Coat	O	O	O
Convertible Top			
Cloth	S	S	—
Retractable hard top	—	—	S
Automatic latching	S	S	S
Automatic retracting top with the touch of a button on the key fob (included with remote start on Sebring Convertible LX model)	P	S	S
Defroster—Electric, rear window	S	S	S
Door Handles			
Body-color	S	S	—
Chromed	—	—	S
Fascias—Body-color	S	S	S
Glass—Solar Control glass for windshield, door and rear windows	S	S	S
Grille—Silver-colored texture, chromed horizontal accents	S	S	S
Hard Tonneau Cover	S	S	S
Lamps			
Quad halogen headlamps	S	S	S
Automatic (included with Electronic Convenience Group)	—	P	S
Headlamp off-time delay	S	S	S
Fog lamps (included with Special Touring Group)	—	P	S
Mirrors			
Black	S	—	—
Dual, power, heated, body-color	—	S	S
Moldings			
Beltline—Chromed	S	S	S
Remote start (included with Electronic Convenience Group and Convenience Group)	P	P	S
Trunk Lid Release—Power	S	S	S
Wiper System—Windshield, variable delay, intermittent mode	S	S	S
INTERIOR			
Air Conditioning			
Manual temperature controls	S	S	—
Single-zone automatic temperature controls (included with Electronic Convenience Group)	—	P	S
Cabin-air Filtration	S	S	S

2010 CHRYSLER SEBRING CONVERTIBLE FEATURE AVAILABILITY

	Sebring Convertible LX	Sebring Convertible Touring	Sebring Convertible Limited
Colors			
Khaki/Light Graystone or Dark Slate Gray	0	0	—
Medium Pebble Beige, Cream or Dark Slate Gray	—	—	0
Color Accents			
Chromed and Alloy Silver	S	—	—
Chromed and Satin Silver	—	S	—
Chromed and Tortoise Shell	—	—	S
Console			
Center console with sliding armrest and dual-level storage	S	S	S
Soft center console armrest	—	S	S
Alloy Silver center console with instrument panel	S	S	S
Premium console armrest	S	S	S
Heated/cooled cup holder (included with Electronic Convenience Group)	—	P	S
Door Handles (Interior)			
Color-keyed	S	S	—
Chromed	—	—	S
Door Locks—Power			
	S	S	S
Floor Mats—Premium			
Front and rear, carpeted	S	S	S
Glove Box			
Locking	S	S	S
HomeLink universal transceiver			
	—	P	S
Instrument Panel			
Analog clock in instrument panel	S	S	S
LED instrument cluster with tachometer	S	S	S
Electronic Vehicle Information Center (EVIC) with trip computer and Tire-pressure Monitoring (TPM) display	—	S	S
Outside temperature display in instrument cluster	S	S	S
Satin Silver instrument cluster trim rings	—	S	S
Alloy Silver door trim bezels	S	S	S
Satin Silver instrument panel, steering wheel, gauge cluster rings and door trim bezels	—	S	S
Tortoise Shell accents on instrument panel, steering wheel and door trim	—	—	S
Soft-touch, reverse in-mold graining	S	S	S
Incandescent map/reading lights for front seats	S	—	—
LED interior map/reading lights for front seats	—	S	S
Map Pockets			
Front door	S	S	S
Rear trim with bottle holders	S	S	S
Passenger seatback	S	S	S
Mirror			
Day/night manual rearview	S	S	—
Automatic-dimming rearview mirror (included with Electronic Convenience Group)	—	P	S
Power Outlets—Two, battery- and ignition-fed			
	S	S	S

2010 CHRYSLER SEBRING CONVERTIBLE FEATURE AVAILABILITY

	Sebring Convertible LX	Sebring Convertible Touring	Sebring Convertible Limited
Seats			
Premium cloth	S	S	—
Leather-trimmed seats and leather shift knob	—	P	S
Premium leather-trimmed (included with Special Touring Group)	—	P	S
Heated leather front (included with Special Touring Group)	—	P	S
Six-way power driver	S	S	S
Six-way power passenger	S	S	S
Driver-adjustable lumbar	S	S	S
Shifter			
Chromed accent bezel	S	S	S
Leather shift knob (included with Special Touring Group)	—	P	S
Sound Systems			
AM/FM radio with six-disc CD/DVD player and MP3 play capability	S	S	S
Six speakers	S	S	—
Boston Acoustics speaker system (included Navigation and Sound Group)	—	P	S
SIRIUS Satellite Radio	S	S	S
Uconnect™ Phone (included with Uconnect Navigation and Navigation and Sound Group)	—	P	P
Uconnect Navigation	—	P	0
Uconnect Multimedia	—	0	0
Speed Control			
	S	S	S
Steering Wheel			
Tilt and telescoping	S	S	S
Sport	S	S	—
Leather-wrapped, audio controls (included with Special Touring Group)	—	P	S
Sun Visors			
Sliding	S	S	S
Visor mirrors	S	S	S
Trunk			
Lid release—Power with internal emergency release	S	S	S
Trunk lid liner	—	—	S
Windows			
Power, front and rear	S	S	S
Express-down driver and passenger windows	S	S	S
Express-down window feature on key fob (included with remote start)	P	S	S
Windscreen (included with Special Touring Group)	—	P	S

2010 CHRYSLER SEBRING CONVERTIBLE FEATURE AVAILABILITY

	Sebring Convertible LX	Sebring Convertible Touring	Sebring Convertible Limited
POWERTRAIN AND CHASSIS			
2.4L DOHC 16-valve I-4 engine with dual Variable-valve Timing (VVT), counter-rotating balance shafts and four-speed automatic transaxle	S	—	—
2.7L DOHC 24-valve V-6 Flex Fuel Vehicle (FFV) engine with dual-tuned intake manifold/non-flex-fuel for CA emissions with four-speed automatic transaxle	—	S	—
3.5L SOHC 24-valve V-6 engine with dual-tuned intake manifold, six-speed automatic transaxle with Auto Stick and dual exhausts with chromed tips	—	—	S
Alternator			
120-amp	S	—	—
140-amp (included with Electronic Convenience Group)	P	S	S
Battery—525 CCA	S	S	S
Brakes—Power, four-wheel disc with ABS	S	S	S
Brake Assist	—	S	S
Engine Block Heater	O	O	O
Front-wheel Drive	S	S	S
Remote start (included with Electronic Convenience Group and Convenience Group)	P	P	S
Steering—Power rack-and-pinion	S	S	S
Suspension			
Front—Independent MacPherson	S	S	S
Rear—Independent multi-link	S	S	S
Traction Control (included with Electronic Stability Control)	—	S	S
Tires			
P215/65R16 All-season	S	—	—
P215/60R17 All-season Touring (included with 17-inch cast-aluminum wheels)	P	S	—
P255/55R18 All-season Performance (included with Special Touring Group)	—	P	S
Wheels and Wheel Covers			
16-inch steel wheels with full covers	S	—	—
17-inch cast-aluminum	O	S	—
18-inch aluminum (included with Special Touring Group)	—	P	—
18-inch chrome-clad	—	—	S

2010 CHRYSLER SEBRING CONVERTIBLE FEATURE AVAILABILITY

	Sebring Convertible LX	Sebring Convertible Touring	Sebring Convertible Limited
SAFETY AND SECURITY			
Air Bags			
Advanced multi-stage driver and front-passenger ^(a)	S	S	S
Front seat-mounted thorax/head	S	S	S
Electronic Stability Control (ESC)	—	0	0
Enhanced Accident Response System (EARS)	S	S	S
LATCH (Lower Anchors and Tethers for CHildren)	S	S	S
Remote keyless entry	S	S	S
Seat Belts			
Three-point belts in all seating positions	S	S	S
Pretensioners and load-limiting retractors for front seat belts	S	S	S
BeltAlert	S	S	S
Tire-pressure Warning Lamp in instrument cluster	S	—	—
Tire-pressure Monitor with specific tire-pressure display	—	S	S
Vehicle Theft Security Alarm—Monitors door, ignition and trunk key cylinders and disables HomeLink ^(b) (included with Electronic Convenience Group and Convenience Group)	P	P	S
Sentry Key [®] engine immobilizer	S	S	S

^(a) Certified to federal regulations that allow less forceful air bags. Always use seat belts. Remember, a back seat is the safest place for children.

^(b) If so equipped.

PACKAGES / EQUIPMENT GROUPS

Convenience Group—Includes security alarm, remote start including remote top and window operation.	0	—	—
Electronic Convenience Group—Includes automatic headlamps, remote start, security alarm, single-zone automatic temperature control, HomeLink universal transceiver, automatic-dimming rearview mirror, illuminated visor vanity mirrors, heated/cooled cup holder	—	0	—
Special Touring Group—Includes 18-inch tires and aluminum wheels, windscreen, leather/chromed shift knob, leather-wrapped steering wheel, steering-wheel-mounted audio controls, leather-trimmed and heated seats and fog lamps	—	0	—
Navigation and Sound Group—Includes Boston Acoustic speaker system, Uconnect Phone and Uconnect Navigation	—	0	—
Smoker's Group—Includes ash receiver and cigar lighter	0	0	0

Legend: S = Standard 0 = Optional P = Available within package or group — = Not available



NOTES

SEBRING CONVERTIBLE